

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
8 April 2004 (08.04.2004)

PCT

(10) International Publication Number
WO 2004/029786 A1

(51) International Patent Classification⁷: G06F 3/00,
H04N 13/00, B25J 13/08, A61B 19/00

7ND (GB). DARZI, Ara [GB/GB]; 93 Windsor Road,
Gerrards Cross, Buckinghamshire, SL9 7NW (GB).

(21) International Application Number:
PCT/GB2003/004077

(74) Agents: ROBERTS, Gwilym, Vaughan et al.; Kilburn &
Strode, 20 Red Lion Street, London WC1R 4PJ (GB).

(22) International Filing Date:
25 September 2003 (25.09.2003)

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,
SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0222265.1 25 September 2002 (25.09.2002) GB

(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (*for all designated States except US*): IM-
PERIAL COLLEGE INNOVATIONS LIMITED
[GB/GB]; Electrical and Electronic Engineering Building,
Level 12, Imperial College, Exhibition Road, London
SW7 2AZ (GB).

(72) Inventors; and


(75) Inventors/Applicants (*for US only*): YANG, Guang,
Zhong [GB/GB]; 4 McKenzie Way, Epsom, Surrey, KT19

Published:

— with international search report

[Continued on next page]

(54) Title: CONTROL OF ROBOTIC MANIPULATION

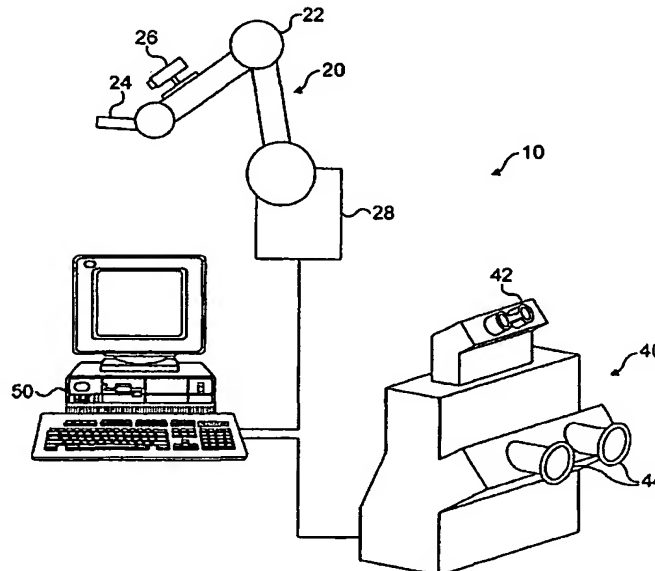

(57) Abstract: In a remote controlled robotic manipulator (20) a motion sensor (26) senses motion of a region of an object to be manipulated. A controller (50) locks motion of the robotic manipulator (26) relative to the region of the object and also selects the region of the object to be sensed. As a result the frame of reference of the manipulator is locked to the relevant region of the object to be manipulated improving ease of control and manipulation.

WO 2004/029786 A1



— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.